


CENTER TRIM

WITH DISPLAY SCREEN MODULE (DSM)


REMOVAL

- 1. Remove the grab handle ([Refer to 23 - Body/Instrument Panel/HANDLE, Grab/Removal and Installation](#)).
- 2. Remove the screw from the lower instrument panel center trim, then firmly grab the lower trim and carefully pull the trim back to release the retaining clips.

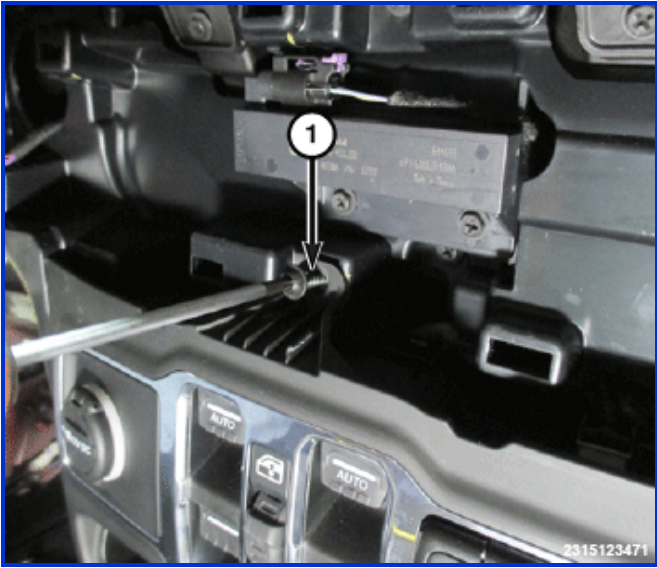

1 - Screw

- 3. Disconnect the power outlet wire harness connector.
- 4. Disconnect the power window switch wire harness connector.
- 5. Disconnect the media hub wire harness connectors.
- 6. If equipped, disconnect the auxiliary switch bank wire harness connector.
- 7. If equipped, disconnect the Off Road Switch wire harness connector.

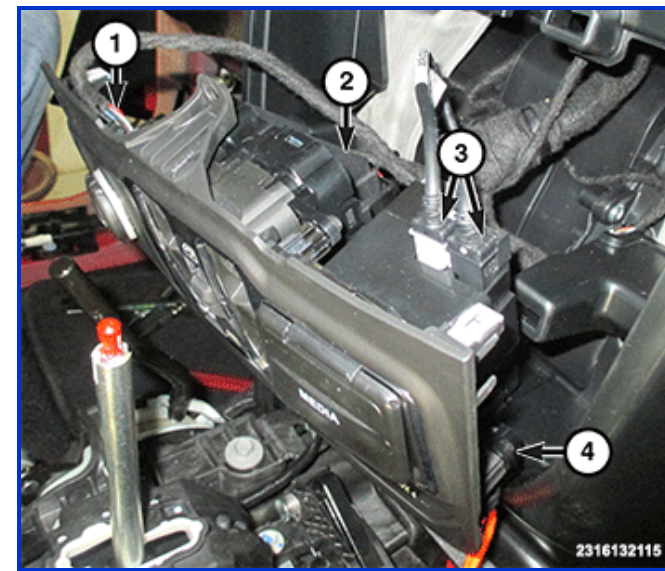

- 1 - Power Outlet Wire Harness Connector
- 2 - Power Window Switch Wire Harness Connector
- 3 - Media Hub Wire Harness Connectors
- 4 - Auxiliary Switch Bank Wire Harness Connector

INSTALLATION

Follow the removal procedure in reverse for general reassembly of the components on the vehicle. The steps listed below are calling out specific procedures that should be followed during installation.

- Verify all clips are fully secured.
- All fasteners are tightened securely.

⊕ WITHOUT DISPLAY SCREEN MODULE (DSM)