


GRAB HANDLE

WITH DISPLAY SCREEN MODULE (DSM)


REMOVAL

- 1. Using a trim stick or equivalent, remove the right side end cap.
- 2. Remove the instrument panel pad ([Refer to 23 - Body/Instrument Panel/PAD, Instrument Panel/Removal and Installation](#)).
- 3. Using a trim stick or equivalent, remove the trim cover.
- 4. Remove the screws securing the grab handle trim panel to the grab handle bracket.

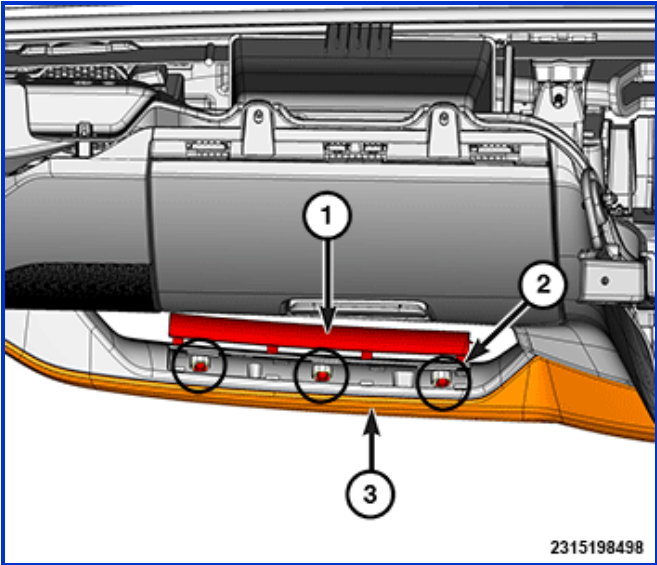

- 1 - Trim Cover
- 2 - Screws
- 3 - Grab Handle Trim Panel

- 5. Remove the screws securing the grab handle trim panel to the instrument panel.
- 6. Using a trim stick or equivalent, remove the grab handle trim panel and disconnect the wire harness connectors.
- 7. If replacing the grab handle trim panel, remove the ICS and the Keyless Ignition Node (KIN) module ([Refer to 08 - Electrical/8E - Electronic Control Modules/MODULE, Integrated Center Stack/Removal and Installation](#)) and ([Refer to 08 - Electrical/8E - Electronic Control Modules/MODULE, Keyless Ignition Node/Removal and Installation](#)).

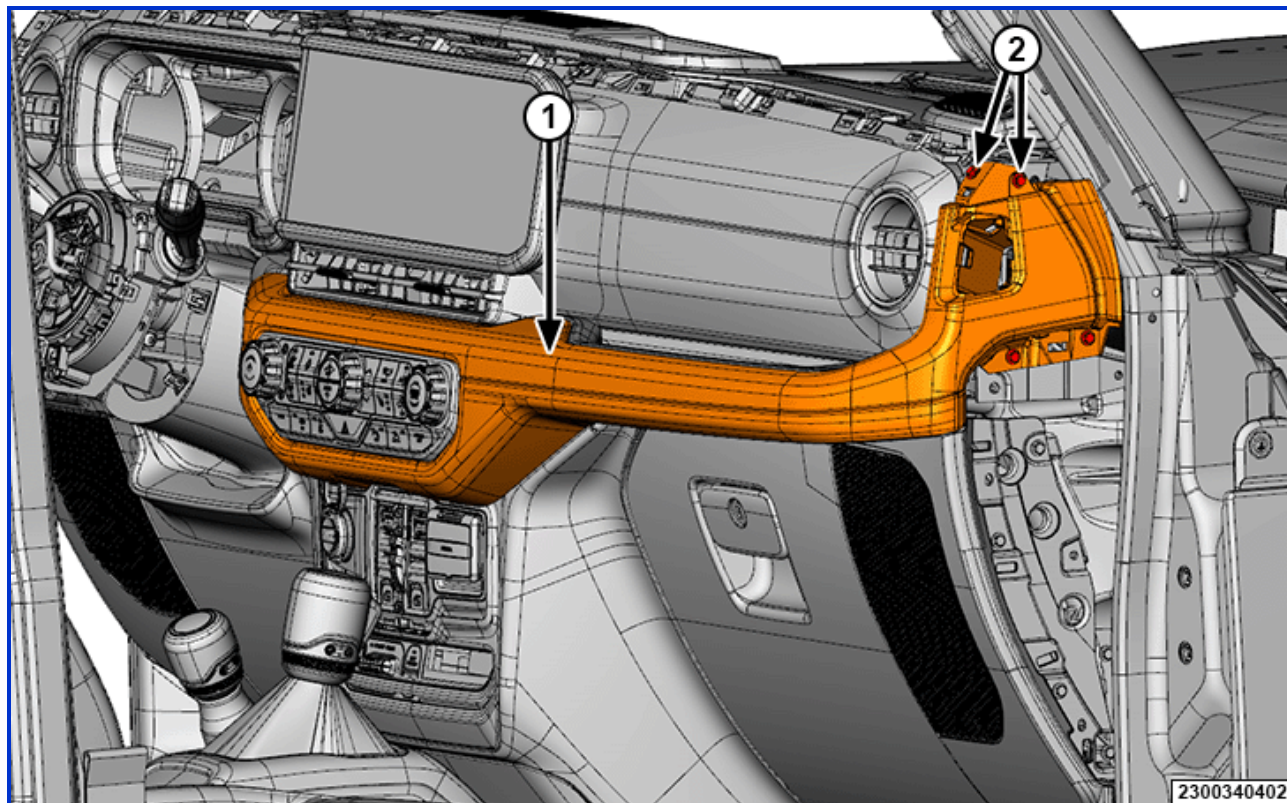


2300340402

1 - Grab Handle Trim Panel

2 - Screws

8. Remove the screws securing the grab handle bracket to the instrument panel.

9. Remove the bolts securing the grab handle bracket to the instrument panel and remove grab handle bracket.

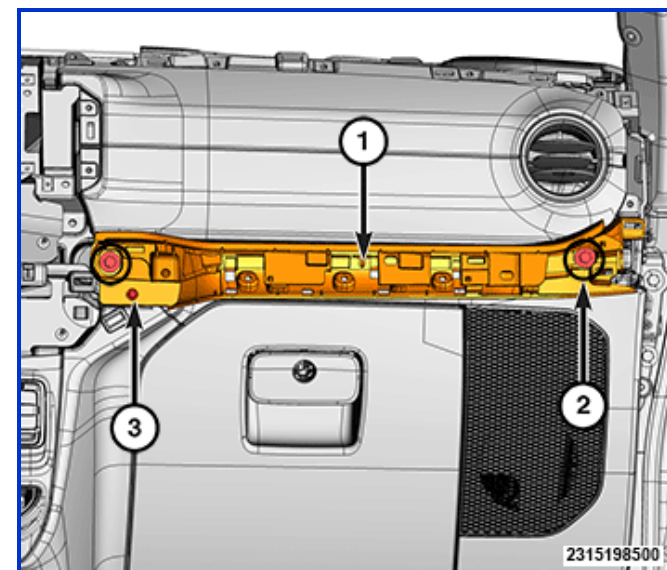

2315198500

1 - Grab Handle Bracket

2 - Bolts

INSTALLATION

Follow the removal procedure in reverse for general reassembly of the components on the vehicle. The steps listed below are calling out specific procedures that should be followed during installation.

- Bolts and screws are tightened securely.

WITHOUT DISPLAY SCREEN MODULE (DSM)