
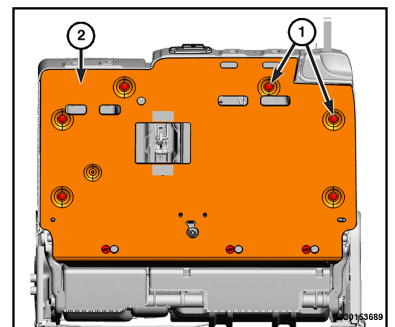
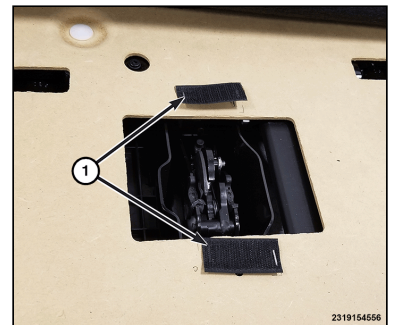


REMOVAL AND INSTALLATION

NOTE: Right side shown, left side similar.

REMOVAL

1. Fold the seat back down.
2. Release the J-hook strip (2) at the bottom of the seat back cover.
3. Open the zippers (1) on each side of the seat back cover.
4. Remove the hook and loop fasteners (1) that secures the seat back cover to the seat back panel.
5. Separate the hook and loop straps at the bottom of the seat cover.
6. Remove the screw securing the seat back panel to the seat back frame.
7. Remove the nine push fasteners (1) that secure the seat back panel (2) to the seat back frame.

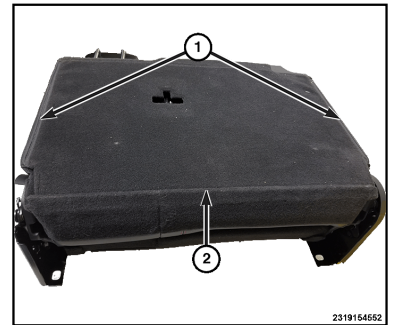

INSTALLATION

1. Position the seat back panel to the seat frame.
2. Install the nine push fasteners that secure the seat back panel to the seat back frame.
3. Install the screw securing the seat back panel to the seat back frame and tighten securely.
4. Fasten the hook and loop straps at the bottom of the seat cover.
5. Fasten the hook and loop fasteners that secures the seat back cover to the seat back panel.
6. Close the zippers on each side of the seat back cover.
7. Fasten the J-hook strip at the bottom of the seat back cover.