


Factory Amplified System Settings

Note: The factory sound system crossover and time correction points are pre-tuned from the factory and saved on the factory amplifier and cannot be changed.


When the SRK-JW18EH is installed in a Jeep Wrangler JL/Gladiator JT with a factory amplified system, crossover and time correction adjustments will not be available by default. If any adjustments are needed for either settings, the "Factory Amplifier" will need to be set to "OFF".

Follow the instructions below to set the factory amplified system tuned to the recommended settings.

1. Turn the factory amplifier "OFF". Access the Installer Settings then Advanced Vehicle Settings > Vehicle Audio Settings > Factory Amplifier (OFF)

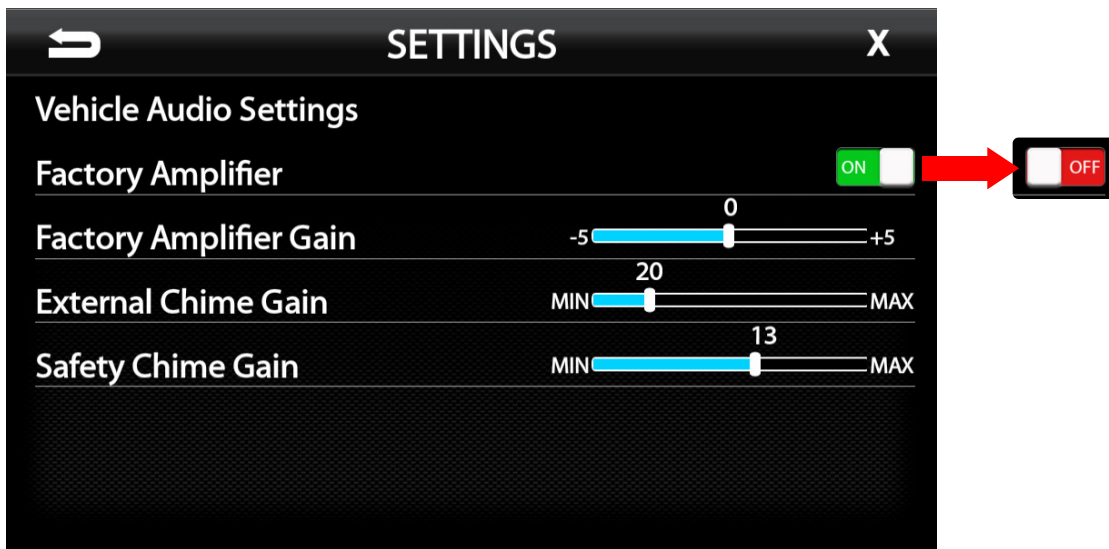

2. Now with the Crossover setting available set the Level for Front and Rear to -2
Home > Settings > Audio Settings

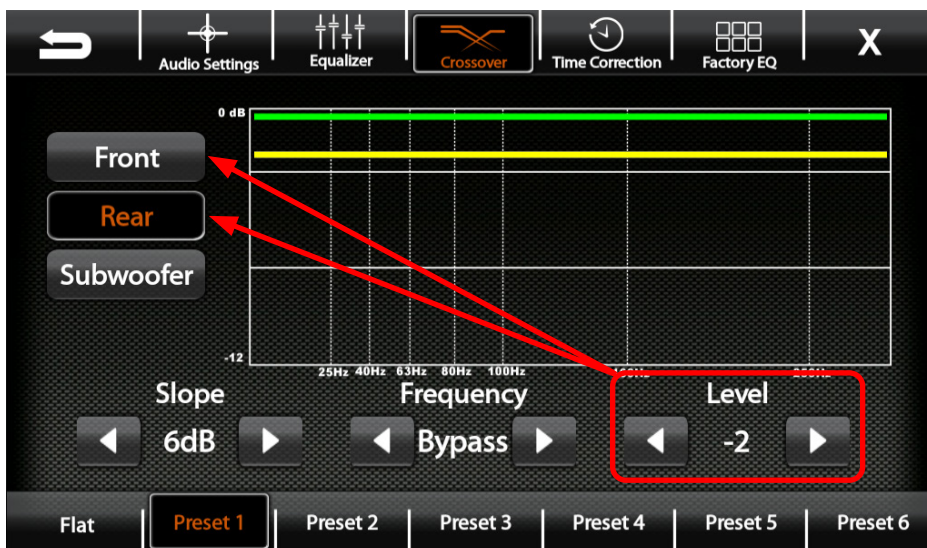

3. Set the EQ curve as recommended below and save it to Preset 1.



EQ Curve Values														
25Hz	40Hz	63Hz	100Hz	160Hz	250Hz	400Hz	630Hz	1k	1.6k	2.5k	4k	6.3k	10k	16k
+5	+3	+2	0	+2	0	0	+1	+3	0	0	0	+2	+4	+5

4. Turn the factory amplifier back "ON" to prevent any unwanted changes to the Crossover. Access the Installer Settings then Advanced Vehicle Settings > Vehicle Audio Settings > Factory Amplifier (ON)

