


INSTRUMENT PANEL PAD

WITH DISPLAY SCREEN MODULE (DSM)

REMOVAL


1. Disconnect and isolate the negative battery cable(s) ([Refer to 08 - Electrical/Battery System/Standard Procedure](#)).
2. Remove the fasteners then use a trim stick or equivalent to release the upper center instrument panel trim, if present disconnect wire harness connector.

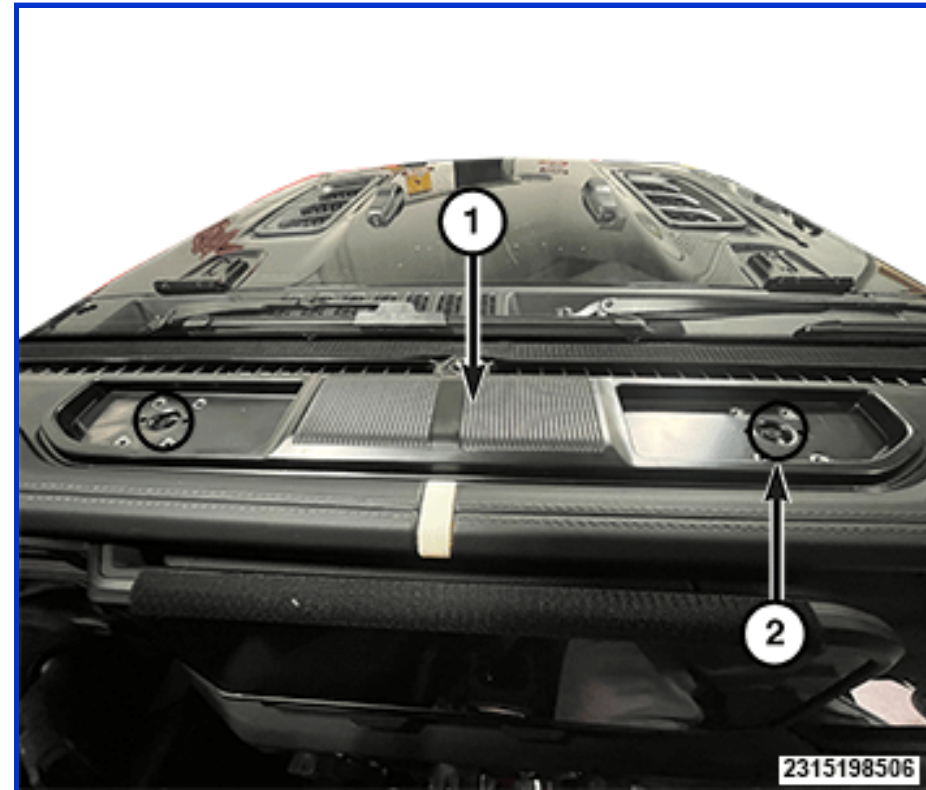

1 - Upper Center Instrument Panel Trim

2 - Fasteners

3. Remove the fasteners then use a trim stick or equivalent to release the retaining clips for the instrument panel pad.

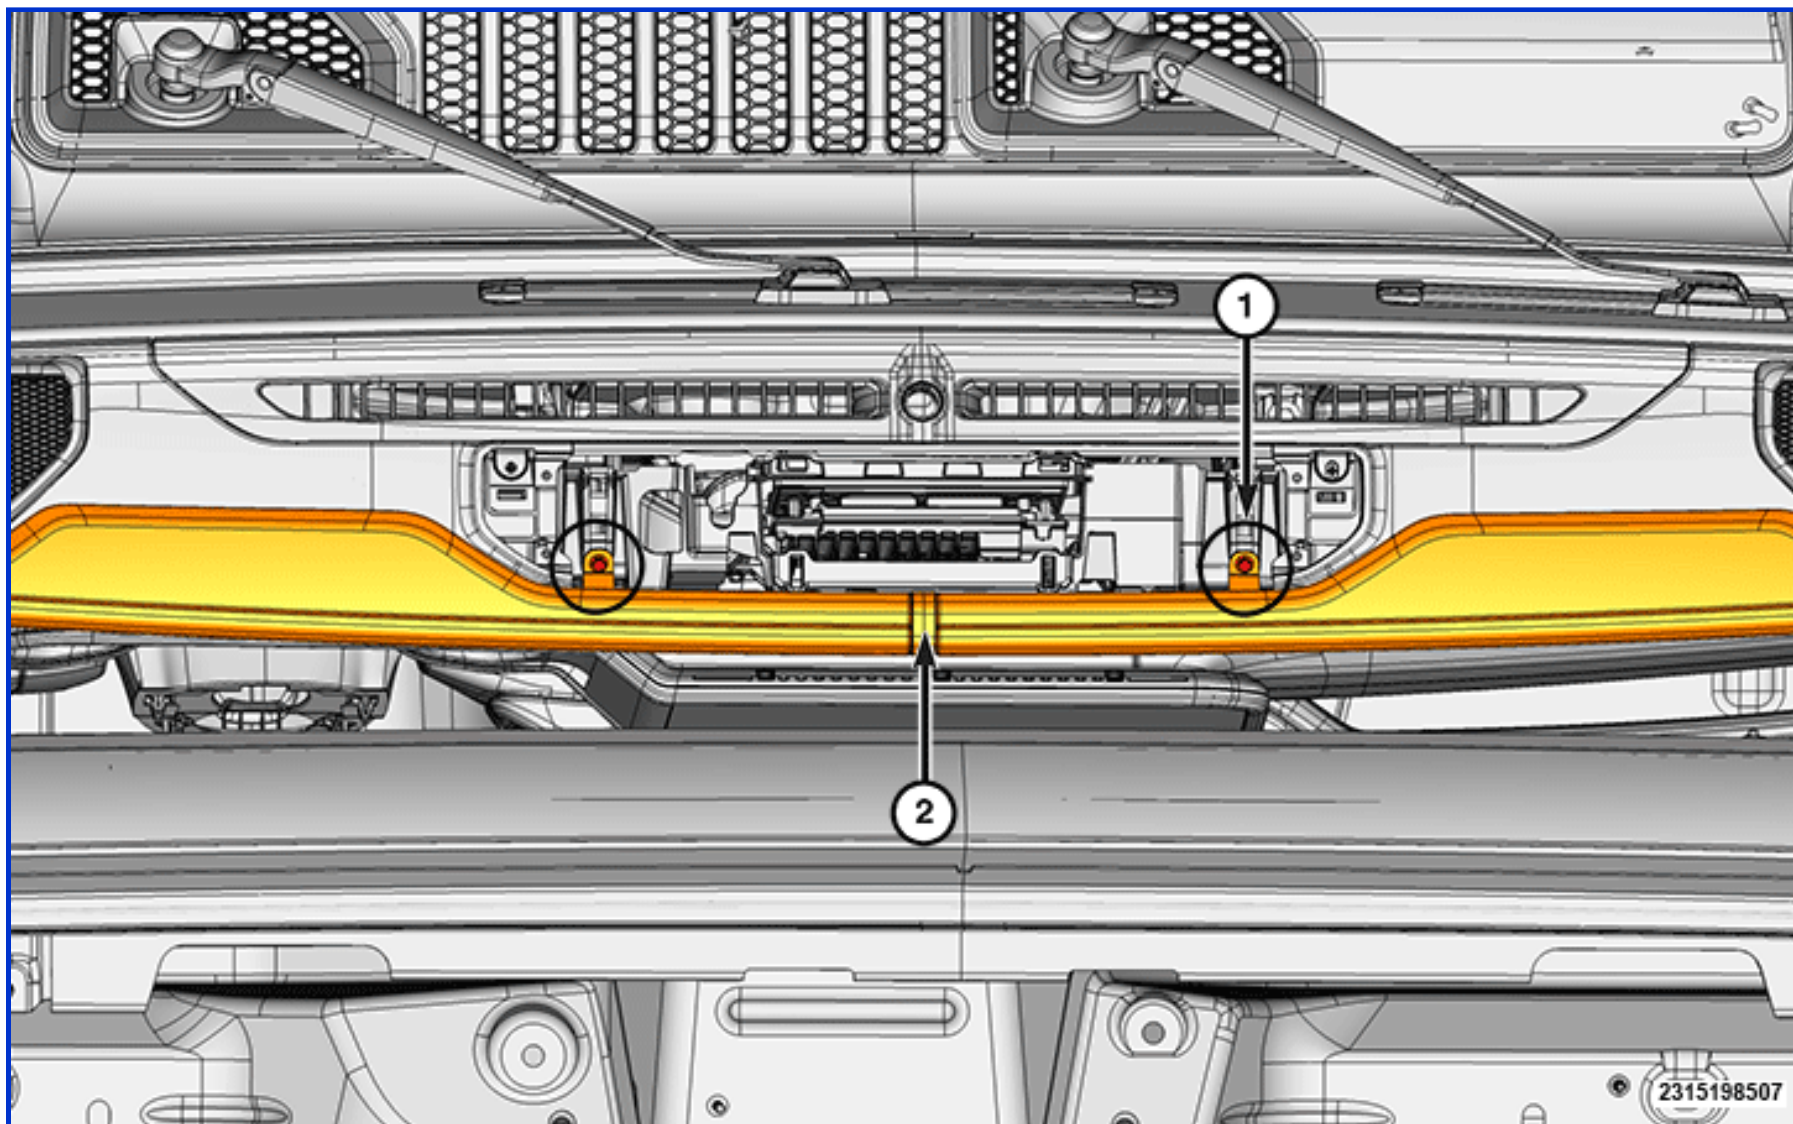

1 - Fasteners

2 - Instrument Panel Pad

INSTALLATION

Follow the removal procedure in reverse for general reassembly of the components on the vehicle. The steps listed below are calling out specific procedures that should be followed during installation.

- All fasteners are tightened securely.

WITHOUT DISPLAY SCREEN MODULE (DSM)